

带指示灯16位 转换端子台 S003

16 bit transition terminal block with indicator S003

● 特点 Features

采用2组10P连接器——对应10P端子台，不分输入/输出，可双向连接使用；

本转换板主要作转接使用，配合本公司本系列其它产品，完全实现高效率省配线的连接；

将灵活运用发挥到极限。

采用LED显示,动作状态一目了然。

Utilizes two groups of 10P connectors to march with 10P terminal blocks. It can be used as a 2-way connection either as input or output. This module is used for reconfiguring connector to terminal and vice versa. When used in combination with other products of the same series of this company, it can fully realize high-efficiency and wiring saving connection;

Flexible wiring to maximize efficiency.

Utilizes LED display to display operating status.

● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBT-V-0防火等级	参考标准 Reference Standard	UL
端子材料 Terminal Material	铜合金		额定电流 Rated current	2.0A
电镀层 Plating	锌角镀金		接触电阻 Contact resistance	<20毫欧
主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate		
端子材料 Terminal Material	磷铜	额定电流 Rated current		10A
电镀层 Plating	镀锡	扭矩 Torque		0.4NM(3.5lb-in)
主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate		
端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material		SUS304
扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material		FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货	1~8个 1-8 pcs	9个以上 More than 9pcs
次日(当日)发货 1-2 day		另定发货时间 Agreed by both parties



1. 最小起订量1个正常交期7~10天；
 2. 特殊产品交期20天以上；
 3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products

L 116-1
L 116-2

注：见本册缆线系列

● 剥线长度 Wire stripping Recommendation

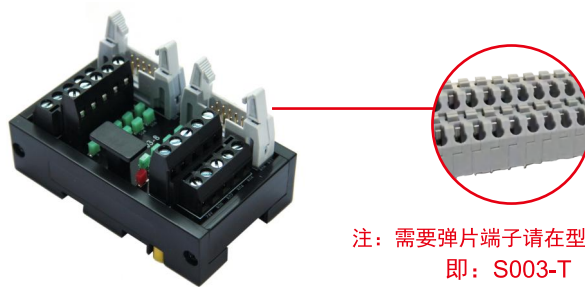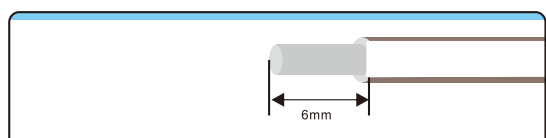

注：需要弹片端子请在型号尾加上“-T”
即：S003-T



● 输入侧额定值/性能 Rated current and voltage specification


额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16

输入/输出侧对应 Corresponding Input/Output Devices

Manufacturers	PLC Module
Panasonic Fp0, FpΣ series	FP0-C16T/C16CT(IN Ministry)
	FP0-C16P/C16CP(IN Ministry)
	FP0-C32T/C32CT/T32CT(IN Ministry)
	FP0-C32P/C32CP/T32CP(IN Ministry)
	FP0-E16T/P(IN Ministry)
	FP0-E32T/P(IN Ministry)
	FP0-E8X
	FP0-E16X
	FPΣ-C28(IN Ministry)
	FPΣ-C32(IN Ministry)
	FP0-C16T/C16CT(Out Ministry)
	FP0-C16P/C16CP(Out Ministry)
	FP0-C32T/C32CT(Out Ministry)
	FP0-C32P/C32CP/T32CP(Out Ministry)
	FP0-E16T/P(Out Ministry)
	FP0-E32T/P(Out Ministry)
	FP0-E8YT
	FP0-E16YT
	FPΣ-C32(Out Ministry)
	FPΣ-C28(Out Ministry)

Button Switch, Photoelectric Switch, Solenoid, Indicator, Stepping Servo Motor, etc.

外形图 Dimensions

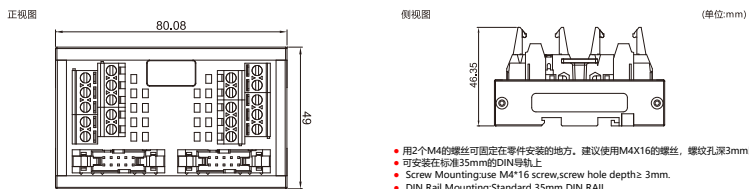

配线图 Wiring Diagram

