


16位 输入输出模块 S010

16 bit input/output terminal block S010

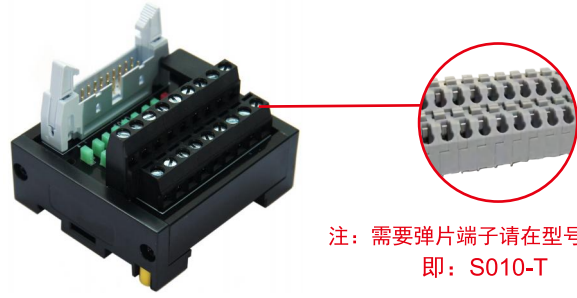

注：需要弹片端子请在型号尾加上“-T”
即：S010-T

● 特点 Features

采用20P的MIL连接器作为进线端；配合本公司相对应的X系列
线缆，可以直接对应市面上任意一款带16位输入/输出的PLC
模块，并且整理为2组8位的端子。

NPN/PNP双极性输入对应，并且指示灯也会跟随输入信号的
不同而亮不同颜色；

绿色—NPN；红色—PNP。

Utilizes a 20pin MIL connector as the incoming terminal.Used in
combination with the corresponding x series cable of the company, it's
directly applicable to any PLC module with 16 bit I/O on the market. The
terminal block is divided into 2 sets of 8 bit terminals.

NPN/PNP bipolar input corresponding, and the indicator light will also
follow the input signal of different and bright color ;

Green - NPN ; Red - the PNP.

⚠ 注意事项 note

- 订购前请确认好PLC引脚定义，选择适合的端子台。
- 和PLC连接时，请务必使用本公司开发的与之对应的专用电缆线。
- Before ordering, please confirm the PLC pin definition, choose the suitable terminal.
- When PLC connection, please be sure to use the company developed and the corresponding special cable.

● 部品详细参数 Pats detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBT V-0防火等级	参考标准 Reference Standard	UL
端子材料 Terminal Material	铜合金		额定电流 Rated current	2.0A
电镀层 Plating	针角镀金		接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
端子材料 Terminal Material	磷铜		额定电流 Rated current	10A
电镀层 Plating	镀银		扭矩 Torque	0.4NM(3.5B~in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
端盖材料 Cover Material	PC V-0防火等级		固定螺丝材料 Fixing screws Material	SUS304
扣件 Fasteners	PC V-0防火等级		PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 <small>Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small>	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
2. 特殊产品交期20天以上；
3. 非损耗品非人为损坏，一年包换，5年包修；

- 1: MOQ 1 PCS delivery date 7-10 days for regular models
- 2: more than 20 days for customized models
- 3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products

适用电缆 Suitable cable	L113-1	L115-2	L118-3
	L11B-1	L115-5	L118-4
	L11B-2	L115-6	L118-6
	L115-1	L118-2	
	(详情请参阅本目录缆线系列) For details, please refer to the directory cable series		

● 适合电线 Suitable wier

1.5 mm²Following/ AWG16 ;
剥线长度 : 6mm




● 规格参数 Specifications

输入 Input	额定电流 Nominal operating current	1A
	额定电压 Nominal coil voltage	DC24V
输出侧对应 Corresponding output Devices		The input side or output side load switches. Input side of the switching elements. The output side of the load.


● 适用PLC Suitable PLC

OMRON	CJ1W-MD231(IN) CJ1W-MD231(OUT) CJ1W-MD232	CJ1W-MD233(IN) CJ1W-MD234(OUT)
MITSUBISHI	FX1NC-16MT(IN) FX1NC-32MT(IN) FX2NC-16MT(IN) FX2NC-32MT(IN) FX3UC-32MT(IN) FX2NC-16EX FX2NC-16EX-C FX2NC-16EXL-C	FX1NC-16MT(OUT) FX1NC-32MT(OUT) FX2NC-16MT(OUT) FX2NC-32MT(OUT) FX3UC-32MT(OUT) FX2NC-16EYT FX2NC-17EYT-C
AB	NX70-X32D NX70-X32D1 NX70-XY32(IN)	NX70-Y32T NX70-XY32(OUT)
Yokogawa	F3WD32-3F	

● 外形图 Dimensions

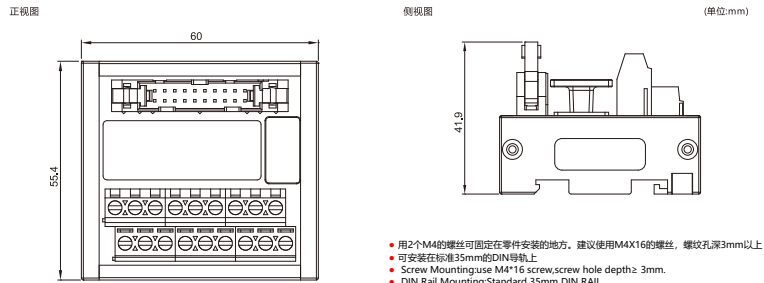

● 配线图 Wiring Diagram

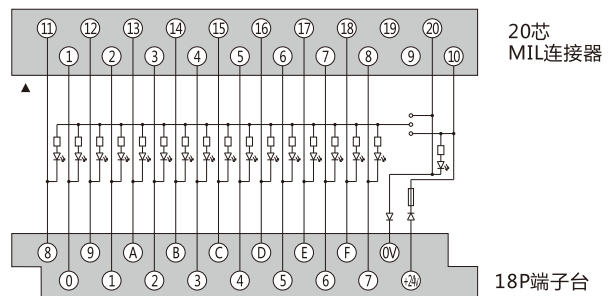

S010