


40位欧式 转换端子模块 S024

40 bit terminal block S024

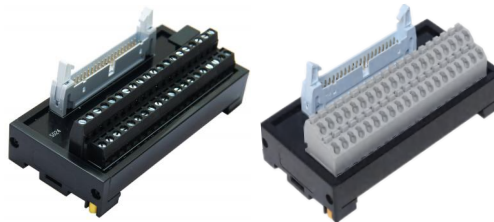

● 特点 Features

本产品为40P连接器对应40P端子连接；
体积最小型化设计。

This product is a 40pin terminal connection for 40pin connector;
Small size for space saving.

类似产品 Similar products



● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBT-V0防火等级	参考标准 Reference Standard	UL
端子材料 Terminal Material	铜合金		额定电流 Rated current	2.0A
电镀层 Plating	针角镀金		接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
端子材料 Terminal Material	磷铜		额定电流 Rated current	10A
电镀层 Plating	镀锌		扭矩 Torque	0.4NM(3.9lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
端盖材料 Cover Material	PC V-0防火等级		固定螺丝材料 Fixing screws material	SUS304
扣件 Fasteners	PC V-0防火等级		PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 <small>Deliver immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small>	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties


- 最小起订量1个正常交期7~10天；
 - 特殊产品交期20天以上；
 - 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products



注：见本册缆线系列

外形图 Dimensions

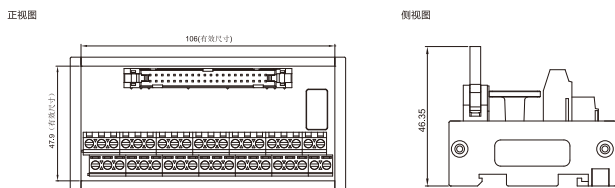

S024

- 用2个M4的螺丝可固定在零件安装的地方。建议使用M4X16的螺丝。螺丝孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting: use M4*16 screw, screw hole depth ≥ 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.



● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16


输入/输出侧对应 Corresponding Input/Output Devices

	Manufacturers	PLC Module		
输入侧对应 Corresponding input Devices	KEYENCE	KV-1000	KV-3000	KV-5000
		KV-H20S	KV-H40S	
		CJ1W-ID231	CJ1W-OD232	
		CJ1W-ID261	CJ1W-OD233	
		CJ1W-MD261(IN terminal)	CJ1W-OD262	
		CJ1W-ID232	CJ1W-OD263	
		CJ1W-ID262	CJ1W-MD263(Out terminal)	
		CJ1W-MD263(IN terminal)	CJ1W-MD563(Out terminal)	
		CJ1W-OD231	CJ1M-CPU21	
		CJ1W-OD261	CJ1M-CPU22	
	CJ1W-MD261(Out terminal)	CJ1M-CPU23		
	MITSUBISHI Qseries	Qx41	Qx72	QD70P4
		QX41-S1	QY41P	QD70P
		Qx42	QY42P	QD70D
		QX42-S1	Qy71	QD75M
Panasonic Fp0, FpL series	FPG-XY64D2T/P			
	FP2-C1D	FP2-XY64D2P/XY64D7P		
Panasonic Fp2 series	FP2-X32D2	FP2-PP21		
	FP2-X64D2	FP2-PP22		
	FP2-32T/P	FP2-PP41		
	FP2-Y64T/P	FP2-PP42		
	FP2-XY64D2T/XY64D7T	FP2-HSCT	FP2-PXYT	
	SIEMENS	40P Plug with a full range		
Yokogawa PLCFA-M3 Series	F3WD64-3N	F3WD64-3F	F3WD32-3F	
输出侧对应 Corresponding output Devices	Button Switch, Photoelectric Switch, Solenoid, Indicator, Relay or Contactor, etc.			

配线图 Wiring Diagram

S024

40P MIL连接器

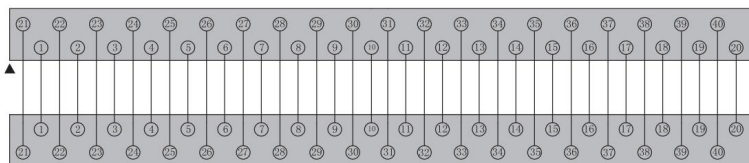

40P 端子台

S024-K

40P MIL连接器

