

26位欧式 转换端子模块 S025

26 bit transition terminal block with indicator S025

● 特点 Features

本产品为26P连接器对应26P端子连接；
体积最小化设计。

This product is a 26pin terminal connection for 26pin connector;
Small size for space saving.

类似产品 Similar products



● 部品详细参数 Parts detailed parameters


MIL 插孔连接器	主体材料 Body Material	PBT V-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式 接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.5lb-in)
端子 主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 <small>Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small>	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties



- 最小起订量1个正常交期7~10天；
 - 特殊产品交期20天以上；
 - 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products



注：见本册缆线系列

● 剥线长度 Wire stripping Recommendation

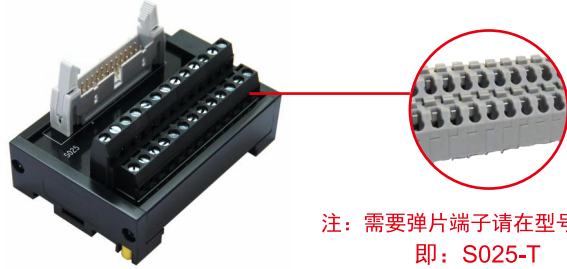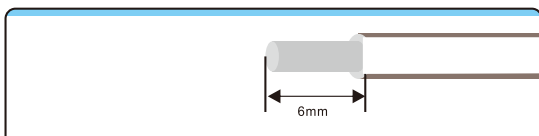

注：需要弹片端子请在型号尾加上“-T”
即：S025-T




● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16

输入/输出侧对应 Corresponding Input/Output Devices


输入侧对应 Corresponding Input Devices	PLC Module
	Manufacturers
	Mitsubishi
	Yaskawa
	Panasonic
	Delta, Sanyo
输出侧对应 Corresponding output Devices	AB etc. servo drive interface
	Servo motor control signal line circuit
	Servo motor control signal line circuit

外形图 Dimensions

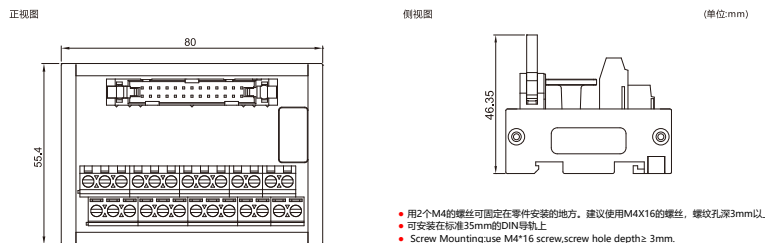

- 用2个M4的螺丝可固定在零件安装的地方，建议使用M4X16的螺丝，螺钉孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting: use M4*16 screw, screw hole depth: 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.

配线图 Wiring Diagram

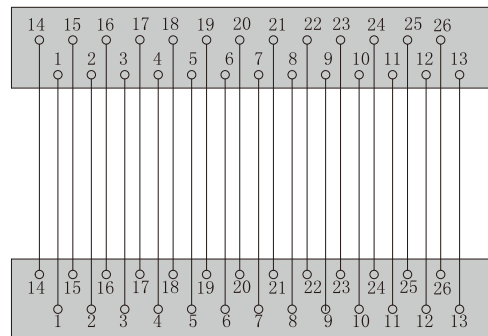

S025