

40位日式 转换端子模块 S034


40 bit terminal block S034

● 特点 Features

本产品为40P连接器对应40P端子连接；
可对应市面上所有带40P MIL插头的PLC连接。
体积最小型化设计。
业界最小空间设计。

This product is a 40pin terminal connection for 40pin connector;
Suitable for all 40 pin terminal connections.
Small size for space saving.
The industry's smallest space design.

类似产品 Similar products



● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.9lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 <small>Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse</small>	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

- 1.最小起订量1个正常交期7~10天；
- 2.特殊产品交期20天以上；
- 3.非损耗品非人为损坏，一年包换，5年包修；


- 1: MOQ 1 PCS delivery date 7-10 days for regular models
- 2: more than 20 days for customized models
- 3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products

L110-4	L110-5
	L118-6

注：见本册缆线系列

● 剥线长度 Wire stripping Recommendation

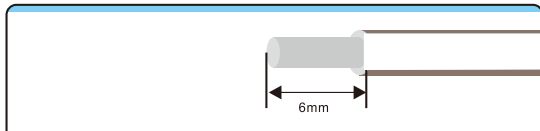


● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16

输入/输出侧对应 Corresponding Input/Output Devices

	Manufacturers	PLC Module			
输入侧对应 Corresponding Input Devices	KEYENCE	KV-1000	KV-3000	KV-5000	
		KV-H20S	KV-H40S		
	MITSUBISHI Qseries	CJ1W-ID231			CJ1W-OD232
		CJ1W-ID261			CJ1W-OD233
		CJ1W-MD261(IN terminal)			CI1W-OD262
		CJ1W-ID232			CI1W-OD263
		CI1W-ID262			CJ1W-MD263(Out terminal)
		CJ1W-MD263(IN terminal)			CJ1W-MD563(Out terminal)
		CJ1W-MD563(IN terminal)			CJ1M-CPU21
		CJ1W-OD231			CJ1M-CPU22
		CJ1W-OD261			CJ1M-CPU23
		CJ1W-MD261(Out terminal)			
	Panasonic Fp0, Fp2 series	Qx41	Qx72	QD70P4	
		QX41-S1	QY41P	QD70P	
		Qx42	QY42P	QD70D	
QX42-S1		Qy71	QD75M		
Qx71		QH42P			
Panasonic Fp0, Fp2 series		FPG-XY64D2T/P			
SIEMENS		FP2-C1D			FP2-XY64D2P/XY64D7P
	FP2-X32D2			FP2-PP21	
	FP2-X64D2			FP2-PP22	
	FP2-32T/P			FP2-PP41	
	FP2-Y64T/P			FP2-PP42	
	FP2-XY64D2T/XY64D7T			FP2-HSCT FP2-PXYT	
Yokogawa PLCFA-M3 Series	40P Plug with a full range				
输出侧对应 Corresponding output Devices	Button Switch, Photoelectric Switch, Solenoid, Indicator, Relay or Contactor, etc.				

外形图 Dimensions

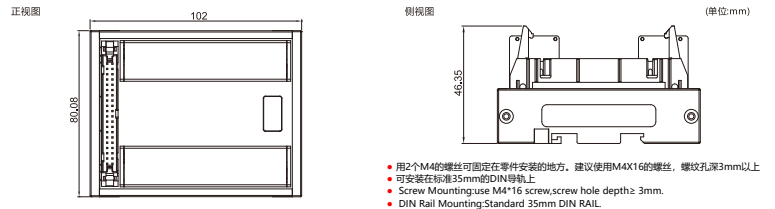

配线图 Wiring Diagram

