

## 32位中转端子模块 S063

32 ways terminal block S063

### ● 特点 Features

采用40PMIL插头作为进线，分出四组8位的10PMIL插头；  
配合本公司的L100系列 连接线和S系列端子台，可以兼容市面  
上所有配有32位I/O的PLC模块；  
灵活的运用使配线工作更快捷。

Utilizes a 40pin MIL and reconfigures 10pin to 4 sets of 8 bit connection.  
When used in combination with the L100 cable and other S series, it's  
compatible with all PLC modules with 32 bit I/O on the market;  
Flexible wiring to maximize efficiency.

### ● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式 接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.4lb-in)
端子 主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

### ● 发货日期 Ship Date


17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
  2. 特殊产品交期20天以上；
  3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models  
2: more than 20 days for customized models  
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

### ● 关联产品 Related products

L111-1	L115-4	L117-2	L115-7	L119-1
L111-2	L116-3	L118-7	L115-8	L119-2
L115-3	L117-1	L118-8	L112-1	

注：见本册缆线系列




### ● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm <sup>2</sup> Following / AWG16


### 输入/输出侧对应 Corresponding Input/Output Devices

Manufacturers	PLC Module	
OMRON	CJ1W-ID231	CJ1W-OD261
	CJ1W-ID261	CJ1W-MD261(Out terminal)
	CJ1W-MD261(IN terminal)	CJ1W-OD232
	CJ1W-ID232	CJ1W-OD233
	C11W-ID262	C11W-OD262
	CJ1W-MD263(IN terminal)	C11W-OD263
	CJ1W-MD563(IN terminal)	CJ1W-MD263(Out terminal)
	CJ1W-OD231	CJ1W-MD563(Out terminal)
MITSUBISHI Qseries	Qx41-S1	Qx71 Qy71
	Qx41	Qx72 QH42P
	Qx42	QY41P Qx81
	QX42-S1	QY42P QY81P
Panasonic Fp0, FpΣ series	FPG-XY64D2T/P	
	FP2-C1D(IN )	FP2-Y64T/P
Panasonic FP2 series	FP2-X32D2	FP2-XY64D2T/XY64D7T(IN)
	FP2-C1D(OUT)	FP2-XY64D2P/XY64D7P(IN )
	FP2-X64D2	FP2-XY64D2T/XY64D7T(OUT )
	FP2-32T/P	FP2-XY64D2P/XY64D7P(OUT)
SIEMENS	6ES7321-1BL00-0AA0	6ES7321-1BH50-0AA0
	6ES7321-1EL00-0AA0	6ES7321-1CH20-0AA0
	SM322/6ES7322-1BL00-0AA0	6ES7322-1FL00-0AA0
	SM323/6ES7322-1BL00-0AA0	6ES7322-1BH00-0AA0
	6ES7321-1BH00-0AA0	6ES7322-1BH10-0AA0
	6ES7321-1BH02-0AA0	6ES7322-1FH10-0AA0
	6ES7321-1BH01-0AB0	6ES7322-1BH01-0AA0
Yokogawa PLCFA-M3 Series	F3WD64-3N(Out terminal)	F3WD64-3F(Out terminal)
输出侧对应 Corresponding output Devices	S080 S082 Q411 Q413 S003 S021	

### 配线图 Wiring Diagram

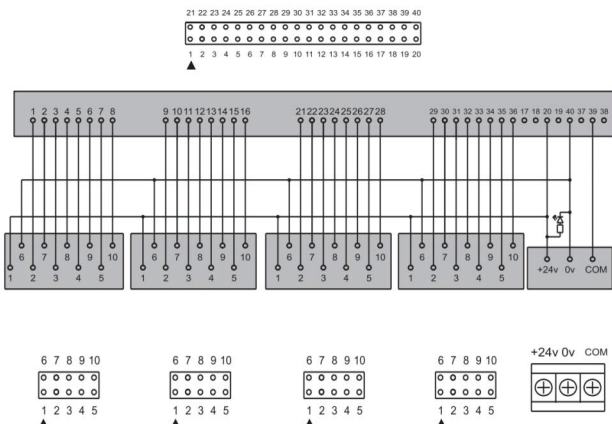

### 外形图 Dimensions

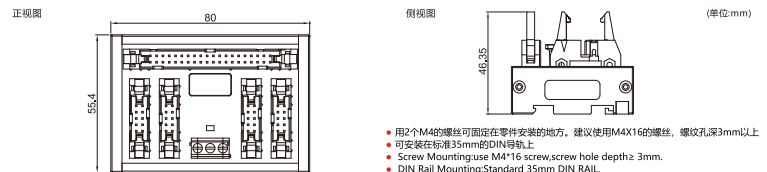

- 用2个M4的螺丝可固定在零件安装的地方，建议使用M4X16的螺丝，螺丝孔深3mm以上。
- 可安装在标准35mm的DIN导轨上。
- Screw Mounting: use M4\*16 screw, screw hole depth ≥ 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.

### ● 压着端子 Crimping Terminal

