

电源插座模块 S071

Power outlet module S071



● 特点 Features

本端子台专为交流控制电路设计；
将一组交流进线改为插座输出,方便外接显示器及笔记本等外设；
端子台装有一路保险丝,可兼作短路保护使用；
带有电源显示LED,以及保险丝断路警示LED。

This terminal block is specially designed for AC control circuit.
The outlet output instead AC, it is easy to connect with the display and computer.
There is a fuse in the terminal block. And it can use for the short current protection.
With power display LED and fuse disconnecting warning LED.



● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	10A
额定电压 Nominal coil voltage	DC24V/220V AC
适合电线 For wire	1.5 mm ² Following / AWG16

● 部品详细参数 Parts detailed parameters


插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Manufacturers	PLC Module
输出侧对应 Corresponding output Devices	不限	不限

输出侧对应: Solenoid, Warning Light, Relay or Contactor

外形图 Dimensions

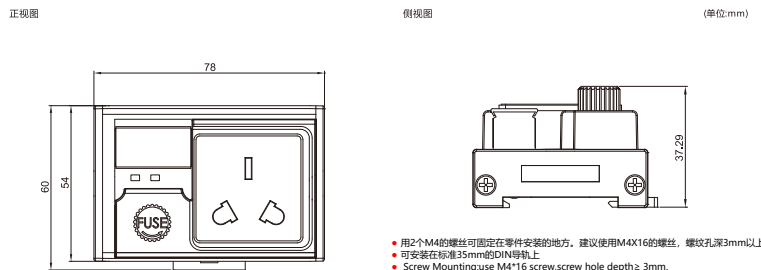


● 发货日期 Ship Date


17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
 2. 特殊产品交期20天以上；
 3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee: one year refundable and 5 year warranty under condition of non-human forces damage

● 剥线长度 Wire stripping Recommendation

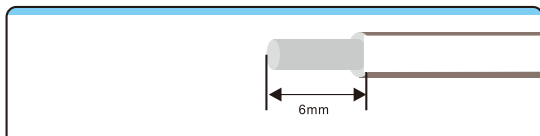

配线图 Wiring Diagram



S071

关联产品 Related products

