

## 公共端子模块 S075

Common terminal block S075

### ● 特点 Features

公用端配线效率大幅提高；  
普通连线端子台完全代替；  
小型化设计、使配线箱更整洁。

Wiring efficiency is greatly enhanced;  
Fully replace common connecting terminal block;  
Neat wiring cabinet.

### ● 部品详细参数 Parts detailed parameters


MIL 插孔连接器	主体材料 Body Material	PBT V-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式 接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
	端子材料 Terminal Material	铜钢	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.5b-in)
端子 主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

### ● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
  2. 特殊产品交期20天以上；
  3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models  
2: more than 20 days for customized models  
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

### ● 剥线长度 Wire stripping Recommendation

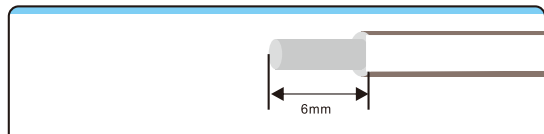


### ● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	10A . 15A . 15A . 10A
额定电压 Nominal coil voltage	DC24V . AC 220V

### 输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices	Switching Power Supply DC Output
输出侧对应 Corresponding output Devices	The various branches of the load components

### 外形图 Dimensions

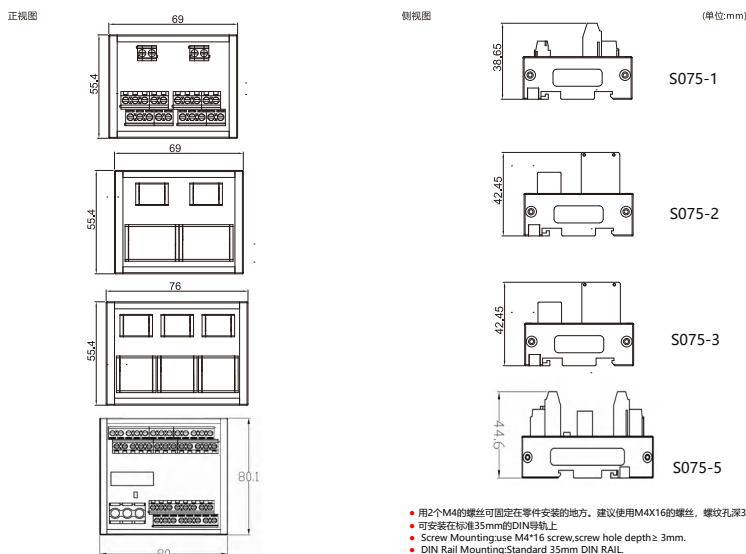

- 用2个M4的螺丝可固定在零件安装的地方。建议使用MAX16的螺丝。螺纹孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting: use M4\*16 screw, screw hole depth ≥ 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.

### 配线图 Wiring Diagram

