

## 通用型端子模块S076 General terminal block S076

### ● 特点 Features

公用端配线效率大幅提高;  
完全代替普通连线端子台;  
小型化设计、使配线箱更整洁。

Wiring efficiency is greatly enhanced;  
Fully replace common connecting terminal block; Neat wiring cabinet.

### ● 部品详细参数 Parts detailed parameters


MIL 插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	UL CE
	端子材料 Terminal Material	镀锌	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

### ● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

- 1.最小起订量1个正常交期7~10天;
  - 2.特殊产品交期20天以上;
  - 3.非损耗品非人为损坏,一年包换,5年包修;
- 1: MOQ 1 PCS delivery date 7-10 days for regular models  
2: more than 20 days for customized models  
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

### ● 剥线长度 Wire stripping Recommendation

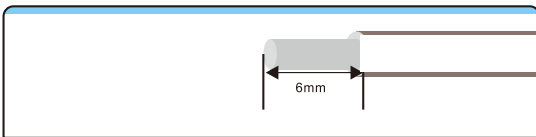

S076  
18位

S076-2  
16位

S076-3  
34位




### ● 输入侧额定值/性能 Rated current and voltage specification


额定电流 Nominal operating current	10A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm <sup>2</sup> Following / AWG16

### 外形图 Dimensions

正视图 侧视图 单位: mm

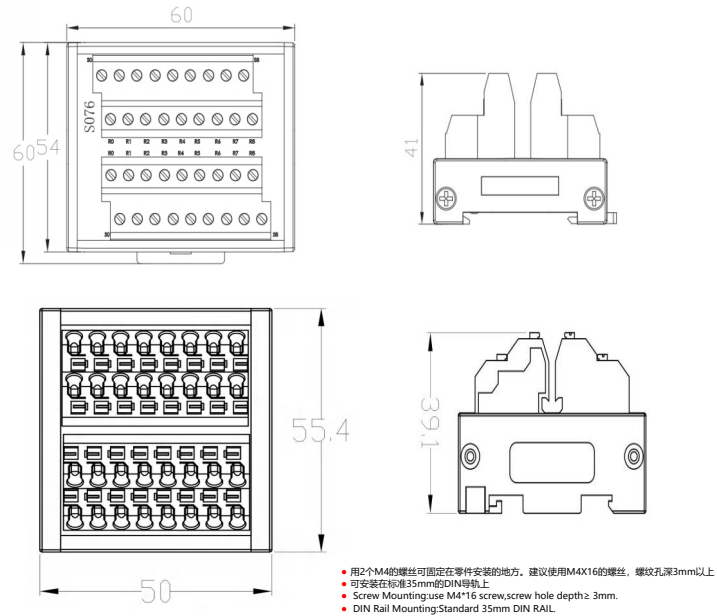

### 配线图 Wiring Diagram

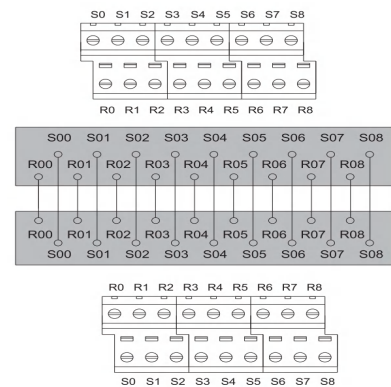

S076