

电源分配模块 S077/S077-XD

Power Distribution Module S077/S077-XD

● 特点 Features

本端子台专为直流控制电路设计；把一路直流输入转为带开关控制及自恢复保险丝的8路输出。

端子台装有8路；自恢复保险可作过流及短路保护用，8路开关可分开控制每路的断开和闭合

带有电源显示LED,以及自恢复保险丝过流及短路警示LED；

配有总电源引出端子，可级联下一个本端子台，使配线更整洁、方便。

This terminal block is designed for direct current control circuit;transfer one direct current to with switch Control and insure 8 output.

This terminal block has 8 ways insurance and it can use for short current prodection, 8 ways switch and can control each off and on.

With LED,fuze and short circuit LED.

There is a main power fetch out terminal, and can connect with the next terminal block.

Make the wiring more tidy and convenient.

● 部品详细参数 Parts detailed pameters

MIL 插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货	1~8个 1-8 pcs	9个以上 More than 9pcs
Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1.最小起订量1个正常交期7~10天；

2.特殊产品交期20天以上；



3.非损耗品非人为损坏，一年包换，5年包修；

1: MOQ 1 PCS delivery date 7-10 days for regular models

2: more than 20 days for customized models

3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 剥线长度 Wire stripping Recommendation

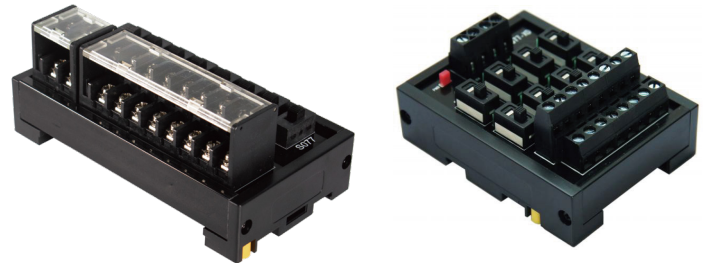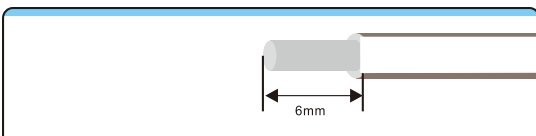

S077

S077-XD



● 输入侧额定值/性能 Rated current and voltage specification



额定电流 Nominal operating current	8A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm² Following / AWG16

输入/输出侧对应 Corresponding Input/Output Devices



输入侧对应 Corresponding Input Devices	Into the line side AC power supply
输出侧对应 Corresponding output Devices	Load-side AC power supply

外形图 Dimensions

正视图 侧视图 (单位:mm)

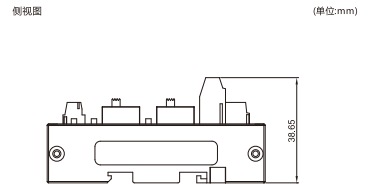


S077-XD



S077

- 用2个M4的螺丝可固定在零件安装的地方，建议使用M4X16的螺丝，螺钉孔深3mm以上
- 可安装在标准35mm的DIN导轨上
- Screw Mounting:use M4*16 screw,screw hole depth>= 3mm.
- DIN Rail Mounting:Standard 35mm DIN RAIL

配线图 Wiring Diagram

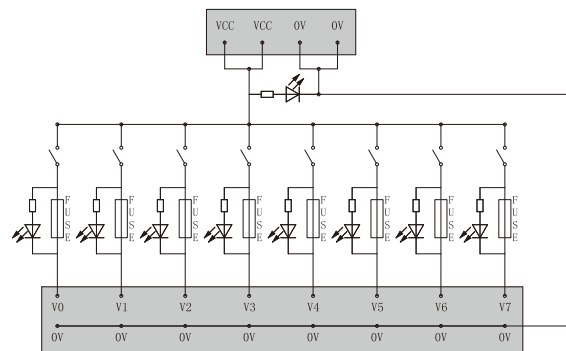

S077