


Mini 4位输入输出端子模块

Mini 4bit input output terminal block

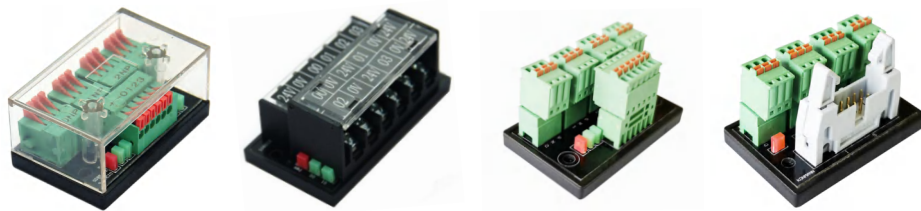

S110

S112

S114

S116

● 特点 Features

本产品为Mini 型接线模块口板，对应各种终端输入信号连接使用；

配有8组3P信号输入口，可接入2线制或3线制信号；

使用10P端子台与控制器端连接，方便进行远程控制使用；

采用动作LED显示，动作状态一目了然；

配合本公司本系列其它产品，完全实现高效率省配线的连接。

This product is Mini-type connection module mouthboard, corresponding to various terminal input signal connections Use;

It has 8 sets of 3pin signal input ports which can accept 2-wire or 3-wire system signals;

A 10pin terminal block is used to connect the controller, convenient for remote control;

Utilizes LED display to display operating status.

When used in combination with other B series products, it can increase the efficiency of wiring work and saves time;



● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16

● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
端子材料 Terminal Material	铜合金		额定电流 Rated current	2.0A
电镀层 Plating	锌角镀金		接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authentic	
端子材料 Terminal Material	磷铜		额定电流 Rated current	10A
电镀层 Plating	镀锡		扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authentic	
端盖材料 Cover Material	PC V-0防火等级		固定螺丝材料 Fixing screws Material	SUS304
扣件 Fasteners	PC V-0防火等级		PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1.最小起订量1个正常交期7~10天；

2.特殊产品交期20天以上；


3.非损耗品非人为损坏，一年包换，5年包修；

1: MOQ 1 PCS delivery date 7-10 days for regular models

2: more than 20 days for customized models

3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

外形图 Dimensions

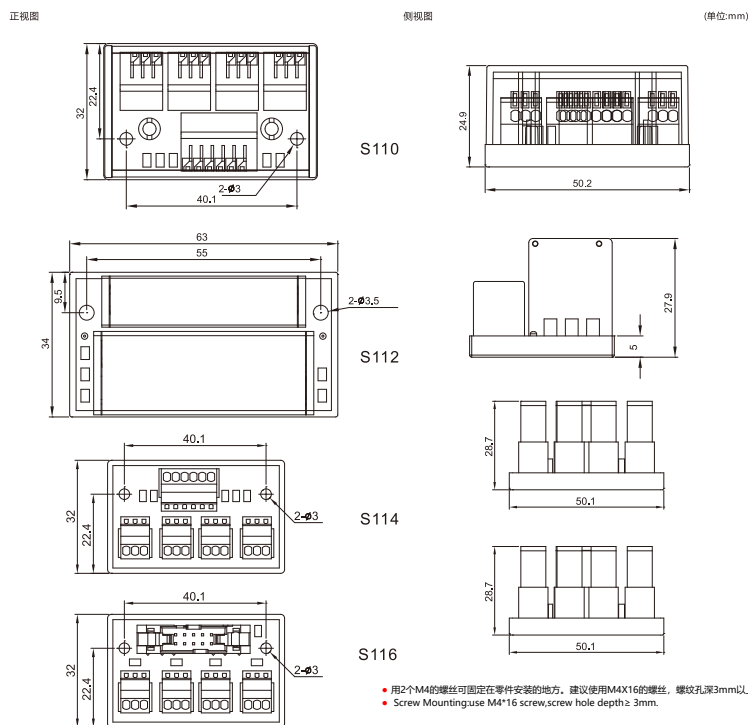

配线图 Wiring Diagram

