

26位中转端子台模块 S132

26-bit transit terminal block S132

36位中转端子台模块 S133

36-bit transit terminal block S133

● 特点 Features

接线端子模块布线接口结构紧凑；
采用标准的MDR连接器，信号线与用于连接截面直到2.5mm的导线的螺钉接线端子相连，产品提供了方便、快捷、低费用的布线接口技术，避免了出现焊接错误；
无需焊线，确认好一对一脚位接线即可；

The wiring interface structure of the terminal module is compact;
The standard MDR connector is adopted, and the signal wire is connected with the screw terminal for connecting the wire with a cross section up to 2.5mm
The product provides a convenient, fast and low-cost wiring interface technology, which avoids welding errors.
No welding line is needed, just confirm the one-to-one pin connection;

● 部品详细参数 Parts detailed parameters

插孔连接器	主体材料 Body Material	PBTV-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	镀锌	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.5lb-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
 2. 特殊产品交期20天以上；
 3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage


● 关联产品 Related products

S132关联产品: L120-2D L120-2DS
S133关联产品: L120-4DS L120-5DS

注：见本册缆线系列

● 适合电线 Suitable wier

1.5 mm²Following/ AWG16 ;
剥线长度 : 6mm



S132


S133



● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1 A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16

外形图 Dimensions

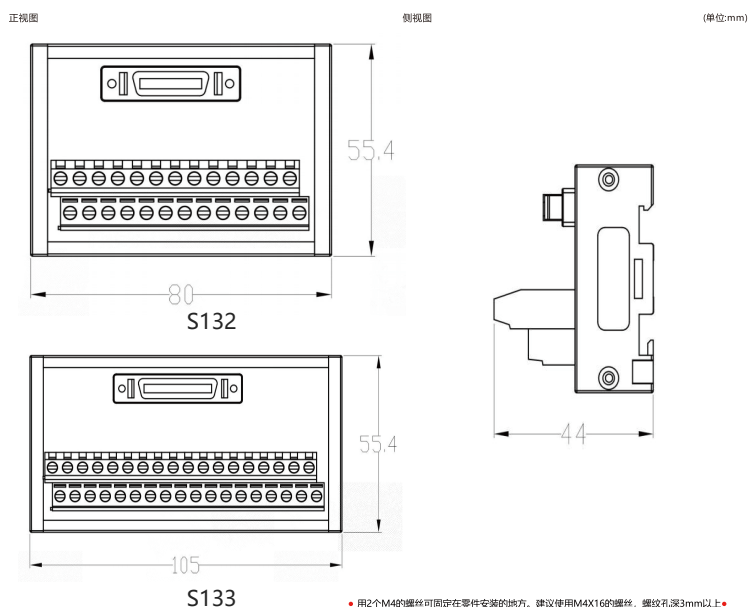

- 用2个M4的螺丝可固定在零件安装的地方，建议使用M4X16的螺丝，螺纹孔深3mm以上。
- 可安装在标准35mm的DIN导轨上。
- Screw Mounting: use M4*16 screw, screw hole depth ≥ 3mm.
- DIN Rail Mounting: Standard 35mm DIN RAIL.

配线图 Wiring Diagram

