


50位中转端子台模块 S064

50-bit transit terminal block S064



注：需要弹片端子请在型号尾加上“-T”
即：S064-T

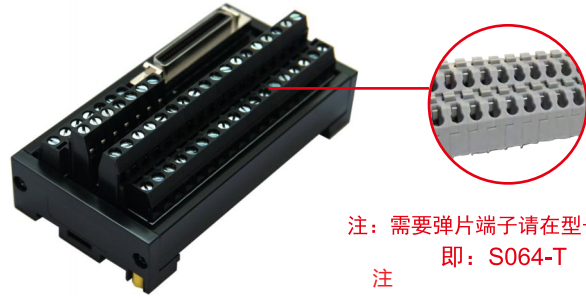

● 特点 Features

本接线板对应50P的MDR连接器；
可直接应用于三菱、安川、松下、台达，三洋，AB等伺服驱动
信号线接口；
无需焊线，只需看准一对一管脚接线即可；
节省时间，避免错误焊接。

This terminal board is applicable to 50 pin MDR connector;
It can be used on the signal line port on Mitsubishi, Yaskawa, py
Delta, Sanyo and AB servo drives;
No soldering is required, Connect the corresponding pins correctly,
saves time and can prevent wrong wiring connections,

● 部品详细参数 Parts detailed parameters

MIL 插孔连接器	主体材料 Body Material	PBT V-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	针角镀金	接触电阻 Contact resistance	<20毫欧
欧式接线端子	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锌	扭矩 Torque	0.4NM(3.5bi-in)
端子主体	主体材料 Body Material	PA 66V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

● 发货日期 Ship Date

17:00前订购的库存品可以当日发货	1~8个 1-8 pcs	9个以上 More than 9pcs
次日(当日)发货 1-2 day		另定发货时间 Agreed by both parties

1. 最小起订量1个正常交期7~10天；
 2. 特殊产品交期20天以上；
 3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models
2: more than 20 days for customized models
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

● 关联产品 Related products

L120-1S
L120-1DS

注：见本册缆线系列

● 适合电线 Suitable wire

1.5 mm²Following/ AWG16 ;
剥线长度 : 6mm




● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm ² Following / AWG16


输入/输出侧对应 Corresponding Input/Output Devices

PLC Module	
输入侧对应 Corresponding Input Devices	Manufacturers
	Mitsubishi
	Yaskawa
	Panasonic
	Delta, Sanyo
	AB etc. servo drive interface
输出侧对应 Corresponding output Devices	Servo motor control signal line circuit

外形图 Dimensions

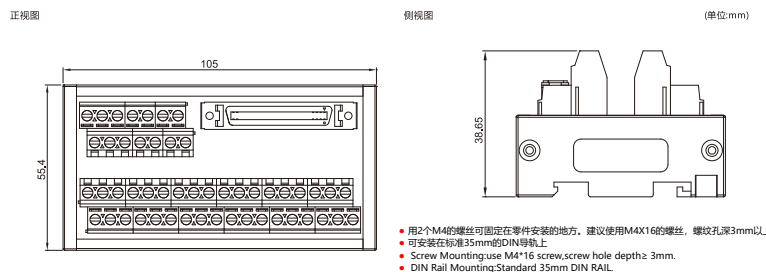

配线图 Wiring Diagram

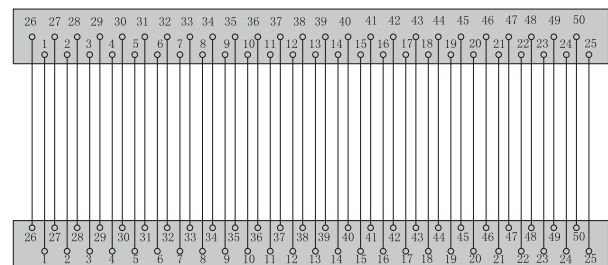

S064