

# 34位日式 转换端子模块 S033

34 bit terminal block S033

## ● 特点 Features

本产品为34P连接器对应34P端子连接；  
可对应市面上所有带34P MIL插头的PLC连接。  
业界最小空间设计。

This product is a 34 pin terminal connection for 34 pin connector;  
Suitable for all 34 pin terminal connections.  
The industry's smallest space design.




## ● 输入侧额定值/性能 Rated current and voltage specification

额定电流 Nominal operating current	1A
额定电压 Nominal coil voltage	DC24V
适合电线 For wire	1.5 mm <sup>2</sup> Following / AWG16

## ● 输入/输出侧对应 Corresponding Input/Output Devices

输入侧对应 Corresponding Input Devices		PLC Module
Manufacturers	KEYENCE	KV-C32XA/C
		KV-C64XA/C
		KV-C32TA/C
		KV-C64TA/C
输出侧对应 Corresponding output Devices		Button Switch, Photoelectric Switch, Solenoid, Indicator, Relay or Contactor, etc.

## ● 外形图 Dimensions

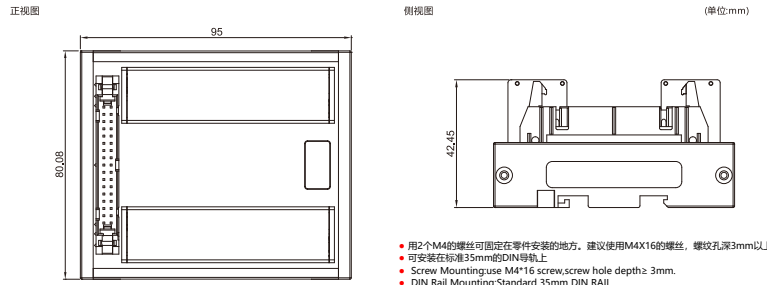

## ● 部品详细参数 Parts detailed parameters


MIL 插孔 连接器	主体材料 Body Material	PBT/V-0防火等级	参考标准 Reference Standard	UL
	端子材料 Terminal Material	铜合金	额定电流 Rated current	2.0A
	电镀层 Plating	锌角镀金	接触电阻 Contact resistance	<20毫欧
欧式 接线端子	主体材料 Body Material	PA 66/V-0防火等级	认证 Authenticate	UL, CE, RoHS
	端子材料 Terminal Material	磷铜	额定电流 Rated current	10A
	电镀层 Plating	镀锡	扭矩 Torque	0.4NM(3.9lb-in)
端子 主体	主体材料 Body Material	PA 66/V-0防火等级	认证 Authenticate	CE
	端盖材料 Cover Material	PC V-0防火等级	固定螺丝材料 Fixing screws Material	SUS304
	扣件 Fasteners	PC V-0防火等级	PCB板材料 PCB board material	FR-4

## ● 发货日期 Ship Date

17:00前订购的库存品可以当日发货 Delivery immediately with confirmed order before 17:00PM day off when there is stock in the warehouse	1~8个 1-8 pcs	9个以上 More than 9pcs
	次日(当日)发货 1-2 day	另定发货时间 Agreed by both parties


1. 最小起订量1个正常交期7~10天；
  2. 特殊产品交期20天以上；
  3. 非损耗品非人为损坏，一年包换，5年包修；
- 1: MOQ 1 PCS delivery date 7-10 days for regular models  
2: more than 20 days for customized models  
3: Guarantee : one year refundable and 5 year warranty under condition of non-human forces damage

## ● 关联产品 Related products




注：见本册缆线系列

## ● 剥线长度 Wire stripping Recommendation

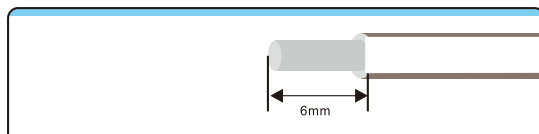

## ● 配线图 Wiring Diagram

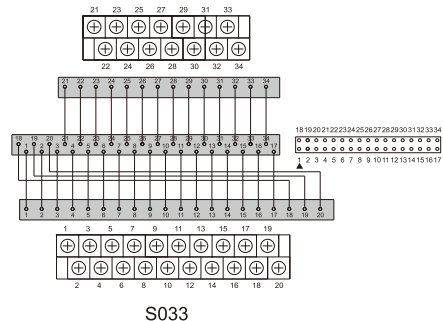

## ● 压着端子 Crimping Terminal

